


Entrance Panel and IP indoor video entry phone

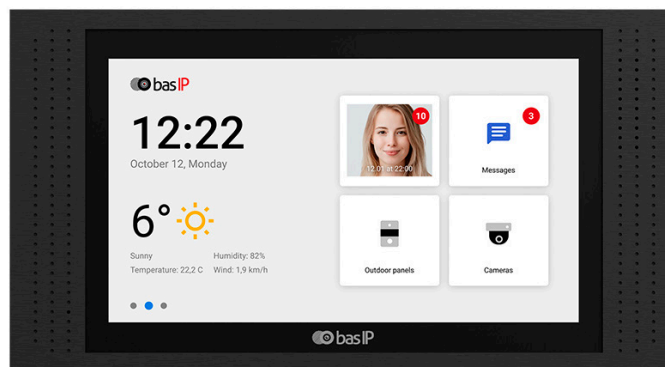

Introduction:

BAS-IP AV-03BD is a stylish entrance panel, which will undoubtedly fit perfectly into the interior of any office center. The panel is made of high-quality plastic and can be utilized in virtually any indoor space.


The New Generation BAS-IP AT-07L IP video intercom indoor monitor is designed with a 7-inch stylish IPS touch-screen colour display and aluminium case, with a rich interface operating on Android OS. It's powerful with a highly configurable, user-friendly interface, easy-to-install, and suitable to be installed in diverse usage scenarios such as apartments, villas, office space, and buildings.

ACTentry offers a convenient and cost-effective alternative to installing physical internal entry phones. The intercom is simply associated with an access control door, and provides the operator with quick visual and audio recognition of the visitor on their computer.

Ordering Information:

Material Number	Description
N54524-Z110-A100	BAS-IP AV-03BD-SVI external intercom (titanium gray)
N54524-Z111-A100	BAS-IP AT-07L-BVI Internal entry phone (black)
P54508-P138-A100	ACTentry Intercom License (1 year per intercom license)
P54508-P139-A100	ACTentry Client License (1 year per ACTentry client license)

IMPORTANT! N54524-Z110-A100 "BAS-IP AV-03BD-SVI external intercom (titanium gray)" includes 1 Intercom and 4 client licenses free for 1 year.

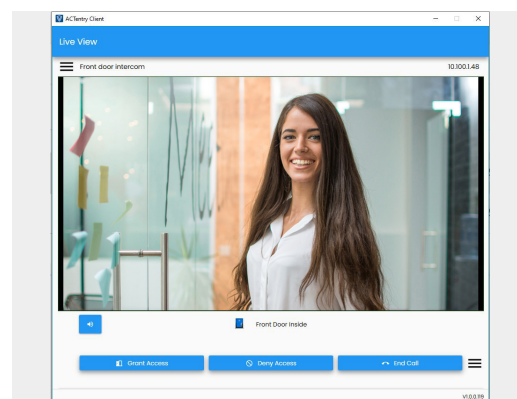

Please Note: Technical support for the integrated ACTentry and BAS-IP solution is only provided to installers who have successfully undertaken the free intercom training course from BAS-IP <https://bas-ip.com/courses/can> and only if the support query relates to the configuration on the BAS-IP intercom with ACTentry.

ACRE[™]
Intelligent Security, Simplified

A-XXXXXX_EN
Edition date: xx-xx-2022

Entrance Panel and IP indoor video entry phone



Main Features	BAS-IP AV-03BD-SVI external intercom	BAS-IP AT-07L-BVI Internal entry phone
Panel type	Individual	
Display	No	7" IPS LCD, capacitive touchscreen
Camera	1/4"	N/A
Angle	110° horizontal x 60° vertical	
Resolution	1 Mp	1024 x 600
Output video	720p (1280 x 720), H.264 Main Profile	
Night backlight	6 LEDs	
Light sensitivity	0,01 Lux	
Protection class	IP64	
Working temperature	-10 — +40 °C	
Power consumption	6.5W (standby 3.6W)	6 W (standby 2.5W)
Power supply	PoE+ or 12V DC	
Colors	Titanium gray	White
Dimensions for installation	25 x 60 x 40 mm	236 x 128 x 26,5 mm
Size of the panel	102 x 160 x 46 mm	
Installation	Surface with and without a hood. (Both brackets included.)	Wall mount, flush mount with a special bracket
Functionality	BAS-IP AV-03BD-SVI external intercom	
Interface	Multi-language graphical and WEB interface.	
Lock opening	By means of a monitor ; an access card, From the BAS-IP Intercom application ; From the BAS-IP UKEY application ; From API.	
Access control integration	MIFARE encoded data and UID.	
ACS Integration	Wiegand-26 output.	
Shortcut buttons	1 touch call button.	
Number of call melodies	4 polyphonic melodies.	
Authentication	Separate password for settings, WEB – interface and RTSP stream.	
Talking mode	Full duplex.	
Additional functionality	Software Link support ; SIP P2P ; Built-in relay ; Open API	
Functionality	BAS-IP AT-07L-BVI Internal entry phone	
Number of call ringtones	9 melodies to choose	
Download custom MP3 ringtones	Yes	
Intercom type:	Audio Intercom, no built-in camera.	
Support of receiving messages	Yes	
Multimedia features	View video, photo and audio files from an SD card.	
Standby mode	Yes, customizable by time.	
Select the type of screensaver in standby mode	Yes	
Multi-camera live viewing	up to IP 4 cameras at the same time	
Clock	Yes	
Photo frame	Yes	
Live tour view	up to 16 cameras, time adjustable	
Single IP camera live viewing	Yes	
Do Not Disturb	Yes, customizable by time.	
Silent mode	Yes, customizable by time.	
Backup photos taken during the call	Yes, to the SD card.	
Ability to install third-party applications	Yes	
Support for third-party widgets	Yes	
Software update	From the web interface ; From SD card ; From BAS-IP updates server	